

# Invacare® Top End® Force™ G Handcycle

## Price List and Order Form

Effective May 15, 2008

For accuracy of ordering, please fax order to Top End at 727-522-1007 or e-mail at TopEndOrders@invacare.com

For questions call 800-532-8677 or 727-522-8677.

To order Literature: 800-828-6282

www.topendwheelchair.com



Provider Name \_\_\_\_\_ Date \_\_\_\_\_ Top End Job Number \_\_\_\_\_  
 Account # \_\_\_\_\_ P.O. # \_\_\_\_\_ Phone # \_\_\_\_\_ Fax # \_\_\_\_\_  
 Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_  
 Customer Name \_\_\_\_\_ Phone No \_\_\_\_\_  
 Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Ship order to:  Provider  Customer

**Order will ship to Provider unless otherwise noted.**

### TOP END FORCE G HANDCYCLE: Trunk Powered Position

- FRCG Top End Force G Handcycle..... \$4,295.00
- 1. **Seat Width:**  14"  15"  16"  17"  18" (For Diagram, see pg. 2)
- 2. **Wheel base:** 60" recommended for users taller than 5'6".  
 60" (standard)  57"
- 3. **Customer Detail:** Height \_\_\_\_\_ Weight \_\_\_\_\_ Disability \_\_\_\_\_
- 4. **Component Choices:** (choose one)  
 Shifter / Brake / Front Wheel Derailleur Packages  
 Rapidfire® Brake/Shifter with Shimano® XT Derailleur, KMC® Chain ..... N/C  
 **XLT53**<sup>1</sup> SRAM® Grip Shifter, Paul® Component Brake Lever and SRAM® X.O. Derailleur / SRAM Hollow Pin Chain..... 550.00  
 **XLT54**<sup>2</sup> SRAM® Trigger Shifter, Paul® Component Brake Lever and SRAM® X.O. Derailleur / SRAM® Hollow Pin Chain..... 625.00
- 5. **Mounting Position: Shifter / Brake Lever** (choose one)  
 Right Handle..... N/C  
 Left Handle..... N/C
- 6. **Caliper Brake Choices:** (choose one)  
 Cane Creek® SCR-3 ..... N/C  
 **XLT55**<sup>3</sup> Cane Creek® SL with Titanium Hardware ..... 150.00
- 7. **Front Wheel Cassette Choice:** (choose one)  
 Shimano® LX 11-32 ..... N/C  
 **XLT57**<sup>4</sup> SRAM® 11-21..... 50.00  
 **XLT58**<sup>4</sup> SRAM® 11-23..... 50.00  
 **XLT59**<sup>4</sup> SRAM® 12-26..... 50.00
- 8. **Chainring Choice:** (choose one)  
 48-40-28 ..... N/C  
 53-40..... N/C  
 53 ..... N/C
- 9. **Top End Cranks:** S Crank (choose length and width)  
 Adjustable Crank Height: 17-21" Standard  
 Length:  190mm  **200mm (std)**  210mm  220mm  
 Width:  22"  **24" (std)**  26"  
 **XLT56** Hand Pedals with Power Plates..... 50.00
- 10. **Performance Upgrades:**  
 **XLT60**<sup>5</sup> SRM® Training System – Professional Road ... 3,500.00
- 11. **Camber 9 degrees** ..... **Standard**  
 XLT142 Camber 3 degrees ..... 100.00

### FOOTNOTES

- <sup>1</sup> Grip shift is operated by rotating the grip mounted on either the right or left handle. Super light. Shifts quickly and accurately, Preferred by most Team Invacare/Top End members.
- <sup>2</sup> Thumb and forefinger operated. Super light weight, high quality components. A great choice for those who want low weight and do not like the grip shift.
- <sup>3</sup> Ultra light weight brake calipers with titanium nuts and bolts.
- <sup>4</sup> Lightweight cassettes that offer closer gear ratios.
- <sup>5</sup> SRM® Power Meter is a state of the art measuring tool. It is like connecting a computer to your handcycle. Visit SRM.de for more details. The Power Meter is integrated directly into the Top End cranks. This is used worldwide by many top professional cyclists and handcyclists.

### WHEELS (Threaded Axle Only)

- 26" High performance wheels with high pressure clincher tires: Standard
- Performance Wheel Upgrade** (does not include standard wheels):
- XLT45** Zipp® 404 26" Carbon rim/ovalized spokes  
 Clincher  Tubular..... 3,000.00
  - XLT50** Zipp® Time Trial Package:  
 Front Wheel: Zipp® 404 Rear Wheels: Zipp® Disc (tubular only) ..... 3,600.00
  - XLT3** Tri spoke 26" carbon fiber ..... 2,250.00  
 Clincher  Tubular
  - XLT43** Spinergy® 26" Carbon rim w/white spokes (clincher only)..... 1,850.00
- Tire Upgrade**
- XLT51** Schwalbe® Stelvio tires (clincher)..... 135.00
  - XLT52** Tufo® S53 tires 180g (tubular) ..... 125.00

### SAFETY & COMFORT OPTIONS

- XLT12** Mirror..... 30.00
- XLT13** Water bottle & cage ..... 35.00
- XLT28** Backpack Hydration System ..... 100.00
- XLT141** Heart Rate Monitor ..... 100.00
- XLT14** Cordless computer ..... 125.00
- XLT15** Helmet..... 75.00  
 Small (6 5/8" – 7")  
 Medium (6 7/8" – 7 1/2")  
 Large (7 1/4" – 7 5/8")
- XLT16** Safety Flag ..... 30.00
- XLT6** Front Safety Light..... 25.00
- XLT7** Rear Flashing Light ..... 25.00
- XLT 33** Alignment Gauge..... 75.00
- XLT20** Bike Rack for Trailer Hitch ..... 450.00  
 1 1/4" (Std.)  2"
- XLT40** Cable kit..... 35.00
- XLT42** Indoor training roller ..... 250.00
- TER100** Click Straps..... 100.00
- RACE22** Top End T-Shirt  L  XL ..... 10.00
- XLT140** Chain Guard, Clamp-on only ..... 60.00
- XLT9** Leg Guard Attachment ..... 75.00

### FRAME COLOR AND UPHOLSTERY

**UPHOLSTERY**  Black std  UPHI Camouflage ..... \$100.00

### CONTEMPORARY COLORS

- Wet Black  Black Prism  White Snow
- Silver Metallic  Silver Vein  Copper Penny

### WAY COOL COLORS

- Electric Blue  Midnight Blue  Cosmic Blue
- Electric Teal  Emerald Green  Grasshopper Green

### TOO HOT COLORS

- Tangerine Red  Electric Red  Grape Madness
- Safety Yellow  Sunkissed Orange  Fruit Fusion

### Special Instructions:

---




---



---

# Invacare® Top End® Force™ G Handcycle

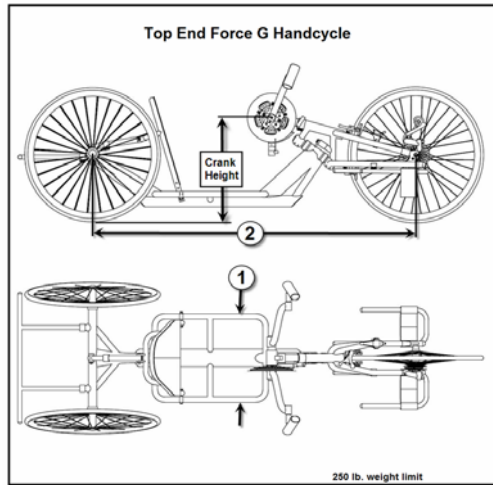

**Handpedals** – Handpedals are made of lightweight aluminum and are ovalized to precisely fit the hand. The bearings which allow the pedal to rotate while pedaling are located in the crankset and not in the pedal, which makes this pedal very comfortable. Power Plates consist of flat aluminum plates welded the lower end of the pedal.

**Footrest** – Multi-adjustable fore and aft w/straps to securely cradle calves and feet. Straps are 4" wide and feature safety straps for ankles.

**Performance wheels** – 36 Spoke wheels with threaded axles and Sun Metal alloy rims. 14 gauge stainless steel spokes. 26" x 1" High Performance Clincher Tire/Tube 100psi

#### Carbon Wheel Upgrades – Threaded axle only

1. 26" (571) Tri Spoke Carbon Fiber wheels are available w/tubular tires or clincher. Rims are aluminum. Wheels not legal for use in IPC sanctioned road races.

2. 26" Spinergy® Tiliium Wheels w/Carbon, aluminum rims and white spokes, Clincher tires only.

3. 26" Zipp® 404 Wheels w/Carbon/Graphite composite rim and stainless ovalized spokes.

4. 26" Zipp® Time Trial Package: Zipp® 404 Front Wheel, Zipp® Disc Rear Wheels. (Zipp® Disc wheels not legal for use in mass start races. Time trial only.)

**Upholstery** – Black nylon upholstery and foam standard.

**Warranty** – 3 year on frame and fork to original owner/limited parts warranty.

**Assembly** – Shipped completely assembled except for rear wheels. Shipping weight is 65 – 70 lbs.

**Options** – See front of form or call for details and photos

**Frame** – Ovalized 6061-T6 aluminum aircraft tubing with internal skeletal structure for increased stiffness.

**Removable Fork** – 6061-T6 aluminum, super stiff with adjustable crank housing.

**Frame Design** – Recumbent 3 piece centerline frame construction with welded seat and adjustable back angle.

**Wheelbase** – 60" Standard, 57" available (not recommended for users taller than 5'8"). Overall Length 86"

**Turning Radius** – 18 feet for 360° circle, 12 feet w/one backing maneuver.

**Static Tip Angle** - 39° for 250 lb subject.

**Transfer Seat Height** – 8" with 2" cushion.

**Backrest** – Adjustable fore and aft.

**Back Angle** – Adjustable angle back of 55° - 90°.

**Propulsion System** – Features a combination of Shimano and Top End components, 27 speed, 48-40-28 chain rings and 11/32 cassette as standard. The 11/32 cassette is operated by the Hands-On Rapid Fire unit which is mounted on the right (standard) handpedal. It operates both the 11/32 cassette and the hands-on brake. The manual derailleur operates the top chainrings utilizing a manual system which eliminates cables and their maintenance. A parking brake/second brake is mounted on the left side of frame.

**Crankset** – Top End S crankset with integral pedal bearings are standard. To choose the width for the crank, consider the end user's shoulder width. The width is measured horizontally center to center to the point at the middle of the handpedal. Length of crankset depends on the length of the arms. The length is measured perpendicular from the center of the crank to the center of the handpedal spindle.

**Steering** – Pivot steering and raked fork for controlled turning and stability.

**Invacare Corporation** [www.invacare.com](http://www.invacare.com)

#### TOP END

Sports and Recreation  
Products

4501 63<sup>rd</sup> Circle North  
Pinellas Park, FL USA  
33781-5914

All rights reserved. Trademarks are identified by the symbols ™ and ®. All trademarks are owned by or licensed to Invacare Corporation unless otherwise noted. Shimano and Rapid Fire are registered trademarks of Shimano Inc. Spinergy is a registered trademark for Spinergy Corp. Zipp is a registered trademark of Composites, Inc. Cane Creek is a registered trademark of Cane Creek Cycling Components. SRM is a registered trademark of SRM Service Center Inc. USA SRAM is a registered trademark of SRAM Corp.  
©2008 Invacare Corporation

